


[L]

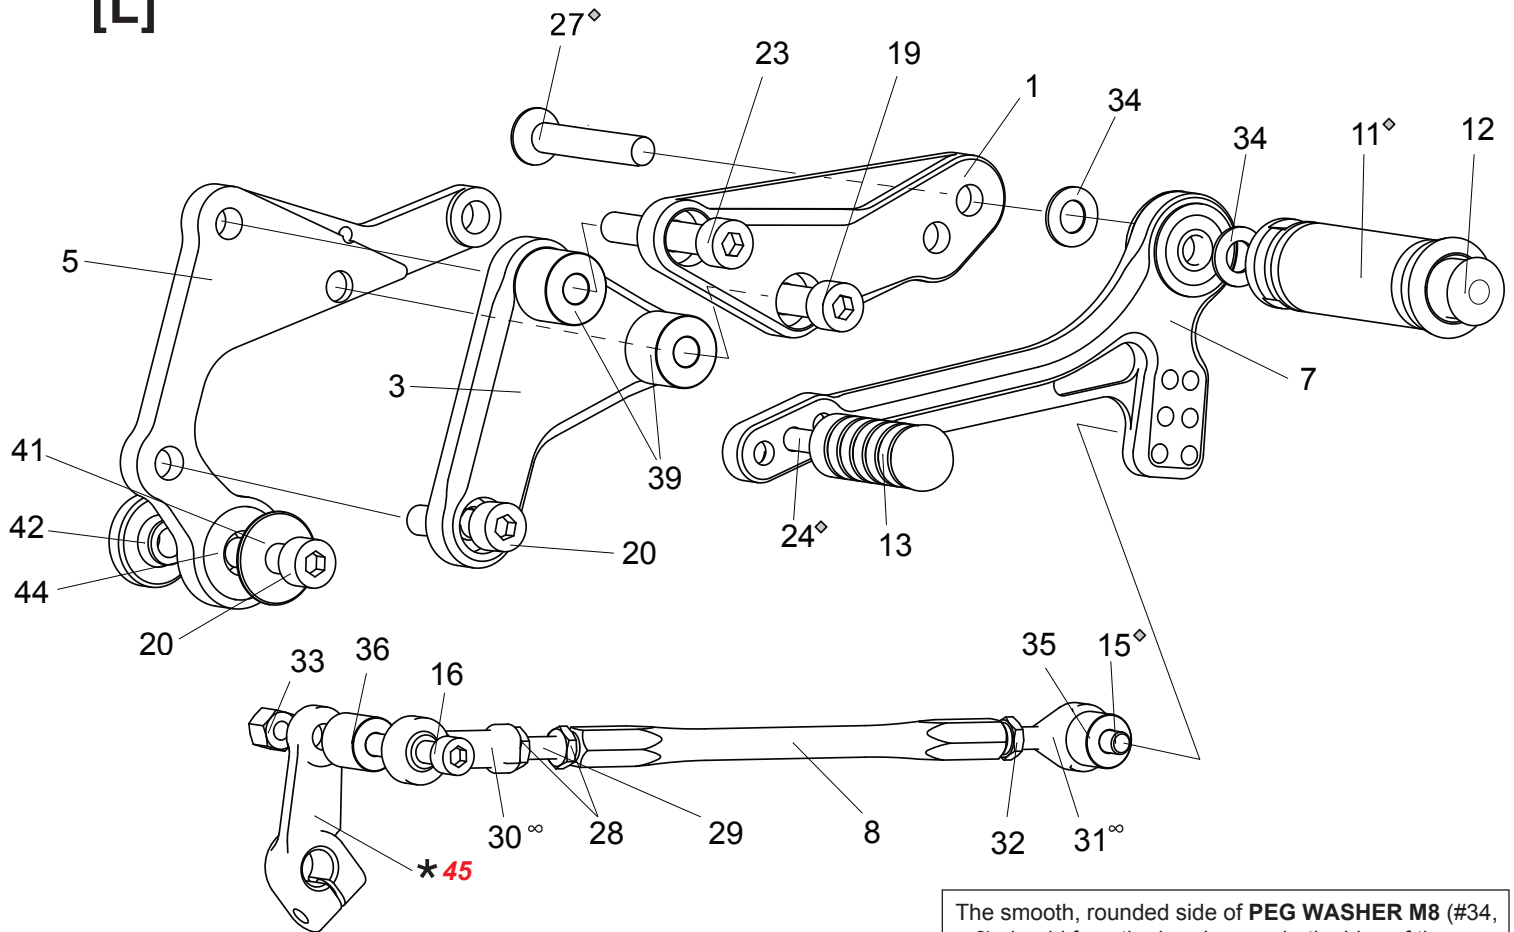

The smooth, rounded side of **PEG WASHER M8** (#34, x 2) should face the bearings on both sides of the **SHIFT PEDAL**, with the rougher, flat sides facing out towards the **FOOT PEG** and the **STEP PLATE** (#1).

- 1. STEP PLATE [L] [S-RGSP-L]
- 3. BASE PLATE 2 [L] (BK) [S-RGBP-L2]
- 5. BASE PLATE 1 [L] (BK) [S-RGBP-L1]
- 7. SHIFT PEDAL [SPD-0102]
- 8. SHIFT ROD 140 [SRD-140]
- 11. FOOT PEG [PEG]
- 12. FOOT PEG END CAP [ST-002]
- 13. PEDAL TIP (DELRIN) [ST-001D18]
- 15. SOCKET HEAD M6x25mm [SBT-M625]
- 16. SOCKET HEAD M6x40mm [SBT-M640]
- 19. SOCKET HEAD M8x25mm [SBT-M825]
- 20. SOCKET HEAD M8x30mm [SBT-M830] x 2
- 23. SOCKET HEAD M8x50mm [SBT-M850]
- 24. BUTTON HEAD M6x20mm [BBT-M620]
- 27. FLAT HEAD M8x45mm [FBT-M845]

- 28. JAM NUT M6 [JNT-6] x 2
- 29. STUD M6 [STUD-M6]
- 30. FEMALE ROD END M6 [RDED-F6]
- 31. MALE REVERSE ROD END M6 [RDED-M6L]
- 32. REVERSE JAM NUT M6 [JNT-6L]
- 33. LOCK NUT M6 [LNT-6]
- 34. PEG WASHER M8 [PWS-8]
- 35. ROD END COLLAR 10-6 (BK)
- 36. ROD END COLLAR 15-6 (BK)
- 39. COLLAR 15-8 (BK) x 2
- 41. URETHANE DAMPER COLLAR 2
- 42. URETHANE DAMPER COLLAR 6
- 44. URETHANE DAMPER 10-12
(PRE-INSTALLED)

★ 45. CHANGE ARM (OEM SUZUKI PART)

◇ Apply threadlocker (Loctite, Vibra Tite or similar) to these bolts before tightening.

∞ Clean and lubricate rod end ball joints periodically.

Due to running improvements in the designs of Sato parts, some new replacement parts may look somewhat different than the original parts with the same part #. These slight differences are mostly cosmetic and have no effect on performance.