


HONDA CBR1000RR '04-'07 REAR SETS

part# H-CBR1RS2 (ver.3 design update)

[L]

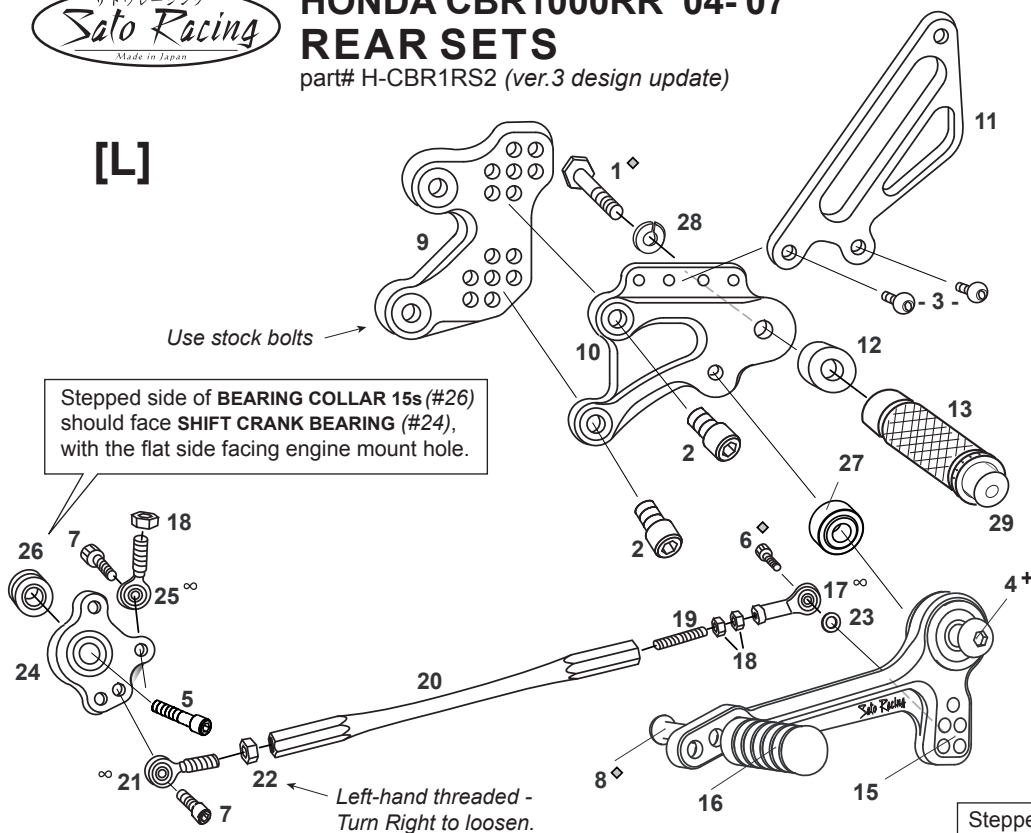


[L]-side

1. HEX BOLT M8x40mm [HBT-M840]
2. SOCKET HEAD M8x15mm [SBT-M815] x2
3. BUTTON HEAD M6x10mm [BBT-M610] x2
4. BUTTON HEAD M8x30mm [BBT-M830]
5. SOCKET HEAD M8x45mm [SBT-M845]
6. SOCKET HEAD M6x20mm [SBT-M620]
7. SOCKET HEAD M6x18mm [SBT-M618] x2
8. BUTTON HEAD M6x20mm [BBT-M620]
9. (L) BASE PLATE [H-CBR1V2BP-L]
10. (L) STEP PLATE [H-CBR1V2SP-L]
11. (L) HEEL GUARD [HG-17L]
12. FOOT PEG COLLAR 12 [PEGCLR-12]
13. FOOT PEG [PEG]
15. SHIFT PEDAL [SPD-0912]
16. PEDAL TIP (DELFIN) [ST-001D18]
17. FEMALE ROD END M6 [RDED-F6]
18. JAM NUT M6 [JNT-6] x3
19. STUD M6 [STUD-M6]
20. SHIFT ROD 160 [SRD-160]
21. MALE REVERSE ROD END M6 [RDED-M6L]
22. REVERSE JAM NUT M6 [JNT-6L]
23. ROD END COLLAR 3(GD) [RDEDCLR-3]
24. SHIFT CRANK(BK) [SK-2]
25. MALE ROD END M6 [RDED-M6]
26. BEARING COLLAR 15S(BK) [PEGBGCLR-15SB]
27. BEARING COLLAR 5S [PEGBGCLR-5SB]
28. SPLIT WASHER M8 [SWS-8]
29. FOOT PEG END CAP [ST-002]

Stepped side of **BEARING COLLAR 5S (#27)** should face shift pedal bearings, with the flat side facing **STEP PLATE (#10)**.

※ADJUST THE STOCK CHANGE ARM WHEN INSTALLING SATO REAR SETS.

[R]

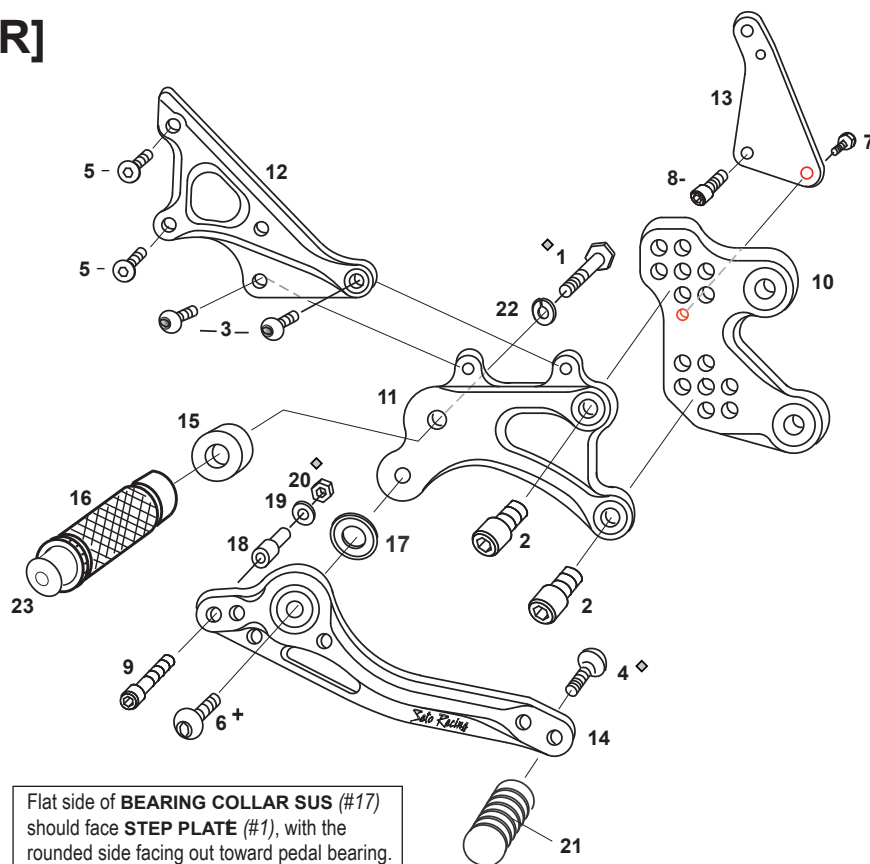

[R]-side

1. HEX BOLT M8x40mm [HBT-M840]
2. SOCKET HEAD M8x15mm [SBT-M815] x2
3. BUTTON HEAD M6x10mm [BBT-M610] x2
4. BUTTON HEAD M6x20mm [BBT-M620]
5. FLAT HEAD M6x20mm [FBT-M620] x2
6. BUTTON HEAD M8x25mm [BBT-M825]
7. FLANGE HEAD M6x10mm [FGBT-M610]
8. SOCKET HEAD M6x15mm [SBT-M615]
9. SOCKET HEAD M6x40mm [SBT-M640]
10. (R) BASE PLATE [H-CBR1V2BP-R]
11. (R) STEP PLATE [H-CBR1V2SP-R]
12. MASTER STAY [H-CBR1V3MS]
13. GUARD STAY(BK) [HGS-HCBR1RS2]
14. BRAKE PEDAL 150 [BPD-1]
15. FOOT PEG COLLAR 12 [PEGCLR-12]
16. FOOT PEG [PEG]
17. BEARING COLLAR SUS [BGCLR-SUS]
18. BRAKE ROD COLLAR 22(BK) [RDED-CLR22]
19. WASHER M6 [WS-6]
20. PLAIN NUT M6 [NUT-6]
21. PEDAL TIP (DELFIN) [ST-001D18]
22. SPLIT WASHER M8 [SWS-8]
23. FOOT PEG END CAP [ST-002]

Not Pictured:

BRAKE LIGHT SWITCH P-1.25 [BSW-125]

Flat side of **BEARING COLLAR SUS (#17)** should face **STEP PLATE (#1)**, with the rounded side facing out toward pedal bearing.

◇ Apply threadlocker (such as Loctite or Vibra Tite) to these bolts before tightening.
This should help prevent any parts from coming loose or falling off during use.

+ (Factory pre-tightened parts have already been Loctited.)

∞ Clean and lubricate rod end ball joints periodically.

POSITIONS

1	0mm	10mm Up
2	10mm Back	10mm Up
3	0mm	20mm Up
4	10mm Back	20mm Up
5	20mm Back	20mm Up
6	10mm Back	30mm Up
7	20mm Back	30mm Up

All measurements are in relation to stock position (0 mm)